

Lab equipment

Reliable storage and testing

Heratherm Incubation Chambers



Thermo Scientific™ Heratherm™ Incubation Chamber, Cat. No. EIG750

Applications

- Microbiological incubation
- Temperature-dependent storage
- Flexible for a variety of testing uses

Benefits

- Sustainable features
- Programmable for restricted access
- Easy to program and operate
- Easy to maintain and move
- Extensive alert and alarm functions
- Choice of exterior solid door with interior glass door or exterior glass door
- 24-month warranty

The Heratherm Incubation produces precise temperature conditions above and below ambient, excellent for microbiological incubation, and heated or cooled storage.

Peltier technology supports temperature stability while offering lower energy usage, compared to traditional compressors.

Achieve data traceability and sample protection when using the restricted access functions found through the touchscreen user interface. Data logging enables 21 CFR Part 11 and IQ/OQ qualification can be implemented with service package.

Operator will be alerted of any temperature deviations, open door, and any technical errors.

The internal chamber has rounded corners, removable shelves, and other components to help facilitate easy care maintenance

Heratherm Incubation Chambers

Product specifications



Specification	Description
Models	
Solid door with inner glass door	EIS750
Exterior glass door	EIG750
Overview	
Chamber size	750 L / 26.5 cu. ft.
Controller	Microprocessor, PID - temperature, with programmability
User interface	7-in. display with capacitive touchscreen
Temperature	
Temperature range	0 to 70 °C / 15 to 40 °C with optional electrical sockets
Temperature increments	0.1 °C
Peltier cooling / heating capacity	$\Delta T \geq 25 \text{ °C} / \Delta T \geq 52 \text{ °C}$
Temp. uniformity at 20°C to 37°C	$\leq \pm 0.5 \text{ °C}$
Temp. stability at 20°C to 37°C	$\leq \pm 0.1 \text{ °C}$
Heat up time to 37°C	$\leq 50 \text{ min}$
Heat up time to 60°C	$\leq 110 \text{ min}$
Cool down time to 0°C	$\leq 200 \text{ min}$
Recovery time at 37°C	$\leq 7 \text{ min}$
Electrical	
Voltage, power	100 - 240 V, 50/60 Hz, 900 W
Energy consumption	3 - 15 kWh per day*
Power plug	Standard plug, based on country: US, EU (Schuko), UK, CN, IN, AU, CH, JP**, DK**
Power cord length	3 m / 9.8 ft power cord
Shelving / load	
Shelves (std. / positions)	3 / 36
Shelf construction	Perforated stainless steel, Type 1.4301 / AISI 304
Shelf dimensions (w x d)	795 x 575 mm / 31.3 x 22.6 in.
Shelf surface area	0.46 m ² / 4.9 ft ²
Max. load on shelf	15.9 kg / 35 lbs. (pulled out) / 30 kg / 66.1 lbs. (stationary)
Max. load on reinforced shelf	90 kg / 198.4 lbs. (stationary)
Max. total load	210 kg / 463 lbs.
Dimensions	
Internal dimensions (WxHxD)	840 x 1450 x 630 mm / 33.07 x 57.09 x 24.8 in.
Exterior dimensions (WxHxD)	1080 x 1835 x 885 mm / 42.52 x 72.24 x 34.84 in.
Shipping weight	EIS750: 381 kg / 840 lbs. EIG750: 372 kg / 820 lbs.
Installation space requirements	Back wall: 200 mm / 7.9 in. Side wall: 150 mm / 5.9 in. Ceiling: 570 mm / 22.5 in.
General information	
Connectivity	Back: Ethernet, USB, Dry contact; Front: USB
Access port - standard	2 - right and left side
Calibration certificate included	37 °C
Certifications	UL, CE

Note: all values are measured according to DIN12880


* Value depends on settings, usage, and environmental conditions

** Cord length of 2.5 m / 8.2 ft


Front view

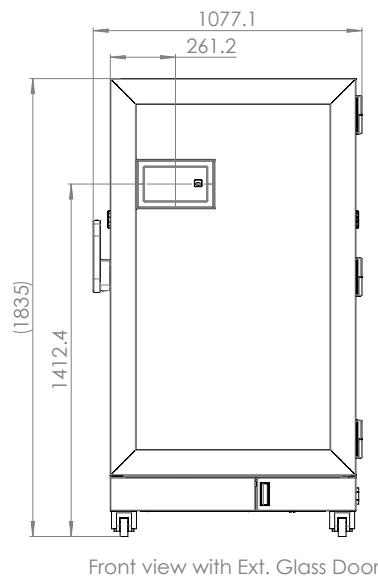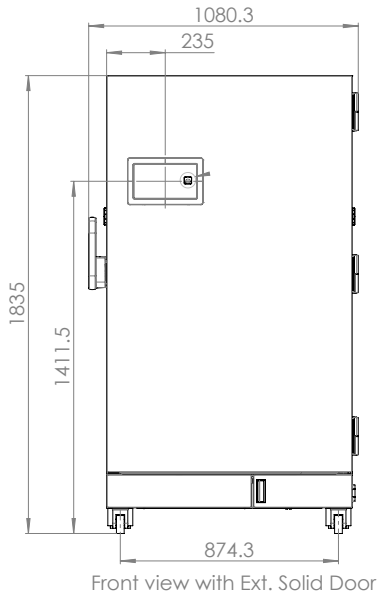


Side view

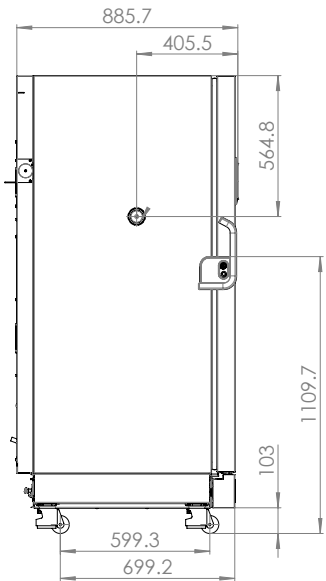

Side view - interior

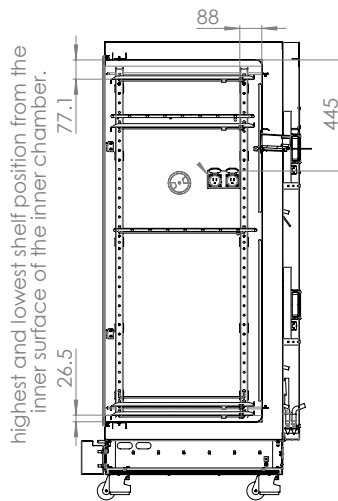

Top view

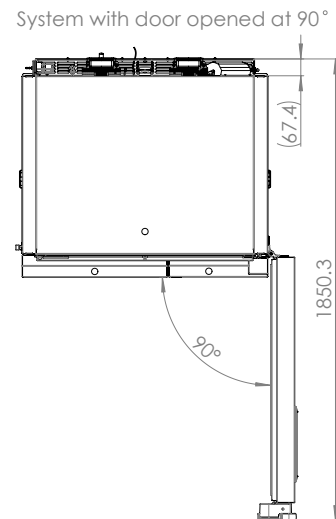

Note: measurements in mm.

Learn more at thermofisher.com/chambers

For laboratory use. It is the customer's responsibility to ensure that the performance of the product is suitable for the customer's specific uses or applications. © 2024 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific or its subsidiaries. **EXT6765 0424**